

★ HYDR = Q56 Q62 94-063790/08 ★ SU 1789750-A1  
 Adjustable drive for plunger pump · drive shaft is three-support  
 crankshaft with three rocker necks displaced to 180 deg. in relation  
 to each other


HYDRAULIC EQUIP CONS TECHN INST 90.10.01 90SU-4870076  
 (93.01.23) F04B 49/00, F16C 3/28

The driveshaft is composed of a three-support crankshaft (4) with  
 three rocker necks angularly displaced from each other to 120 deg.  
 The support necks of the shaft made in the form of discs (8) so as to  
 form cranks (5-7) conjugate with the appropriate eccentric bushes  
 (15) of the rockers of the drive of the plungers. One end neck is  
 equipped with a key (11) and positioned in the axial boring of the  
 worm wheel (3) and the other end neck is linked to the regulation  
 mechanism (10).

The body (1) has an additional boring coaxial to the boring of the  
 worm wheel (3) to take the two middle necks. The pitch and length of  
 the threaded joint (16,17) between the crank and eccentric bush (15)  
 should allow the bush (15) to rotate to an angle of 0-180 degrees.

USE/ADVANTAGE · As an adjustable drive for a plunger pump,  
 for simpler structure and with reduced metal consumption. (4pp  
 Dwg.No.1/2)

N94-048890

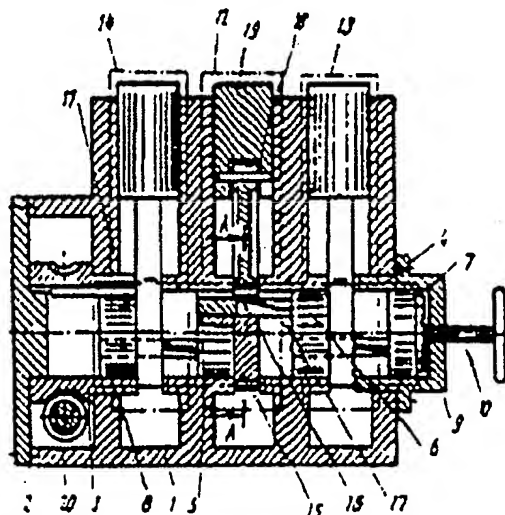

© 1994 DERWENT PUBLICATIONS LTD.

Derwent House, 14 Great Queen Street, London WC2B 5DF England, UK

US Office: Derwent Inc., 1313 Dolley Madison Blvd., Suite 401, McLean VA 22101, USA

Unauthorised copying of this abstract not permitted